


# Slide Rail

D'Angelo are the innovators in fifth wheel building with our multi-purpose Slide Rail Assembly - you don't need anything else when it comes to a D'Angelo Slide Rail.

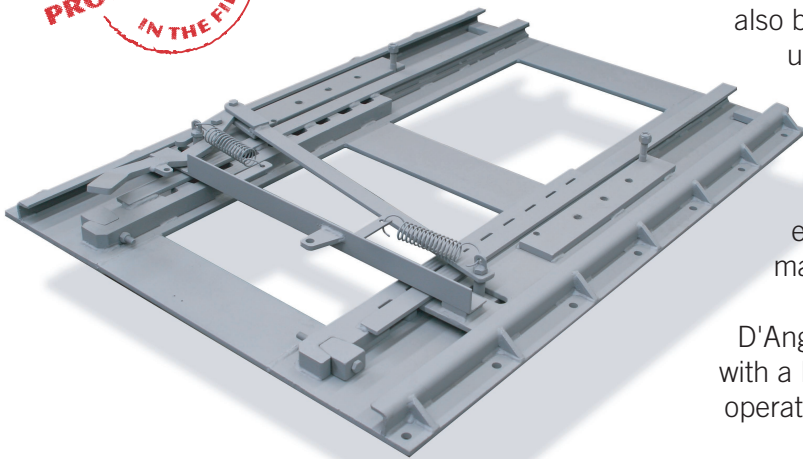

The D'Angelo standard Slide Rail features 9 positions of 75mm increments - a total of 600mm travel and is low profile at 45mm overall to suit fixed plate assembly. A height of 65mm can also be achieved for ballrace assemblies and when using the D'Angelo 12" Greasy Plate assembly it becomes the lowest stabilised slider assembly on the market.

For non-standard applications D'Angelo can extend the range of their Slide Rail to 1200mm or a massive 1800mm.

D'Angelo's Slide Rail is one of the strongest in its class with a D-Value of 190kN and comes with a choice of air operated or manual operation release levers.


## Features

- Suits Fixed, Ballrace or 12" Greasy Plate assemblies
- 600mm (standard) to 1200mm or 1800mm travel
- Manual or air-assisted release lever option
- Low-profile fixed slide rail at 45mm and 65mm for Ballrace and Greasy assemblies
- Compatible with loadcell weighing systems

### Mounting Assemblies



Fixed Plate



Ballrace Assembly



12" Greasy Plate



Loadcell

### Applications

Stock Crate  
Semi-Tipper  
Tanker  
Slide-back Trailer  
Low Loader  
General Freight

Volume Loading  
Mining  
Roadtrain  
Logging  
B-Double


### Specifications

Complies with AS 1773-1990.

Technical Data:

ADR 62/02


D-Value: 190kN  
Weight (5ft Slide Rail): 210kg  
(7ft Slide Rail): 310kg

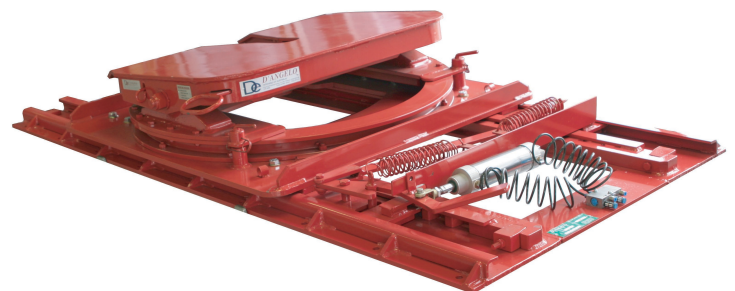

Maxi 50 on single row ballrace slide rail

Designed and manufactured in Australia

126-132 Fitzgerald Road, Laverton North VIC 3026. Ph: +61 3 9369 0633 Fax: +61 3 9369 4717 e-mail: sales@dangelo.com.au



D'ANGELO

www.dangelo.com.au

FIFTHWHEELS • KINGPINS • BALLRACES • SLEWING BEARINGS • SLIDERAILS • 12" GREASY PLATE • TRUCK & TRAILER ACCESSORIES